





Running Boards Side Steps suitable for Toyota RAV4 XA40 (2013-2018) Dusted White

Code **RBTORAV4F1**

Installation Instructions

- All pictures in this manual are for reference only.
- The pictures may be different from the actual objects, but the installation method is the same.
- In order to facilitate your installation, please read the product manual carefully before installation; during installation, please pay attention to protect the surface of your car to avoid scratches.
- Please regularly check whether all accessories connected to the car are loose to ensure safety; regularly clean the pedals to make them last longer.

Components:

Crt.	Accessory name	Quantity	Specifications	Illustration
1	Pedal body	2		
2	Left front bracket	1		
3	Left rear bracket	1		
4	Right front bracket	1		




Running Boards Side Steps suitable for Toyota RAV4 XA40 (2013-2018) Dusted White

Code **RBTORAV4F1**

5	Right rear bracket	1		
6	U-bolts	2	MS	
7	Round head square neck bolts	4	M8X30	
8	Flange nut	8	MS	
9	Splint	2		
10	T Type Bolt	2	M12X50	

Running Boards Side Steps suitable for Toyota RAV4 XA40 (2013-2018) Dusted White

Code **RBTORAV4F1**

11	Hexagon flange bolts	1	M10X40	
12	Hexagonal nut	2	M12	
13	Flat gasket	2	M12	
14	PVC washer	2	M12	

Installation of the left front bracket:

Use a screwdriver to remove the chassis paint from the side beam of the chassis as shown in Figure 1, so that the installation hole of the front bracket can be seen.

Place the (6) U-shaped wire in the installation hole as shown in Figure 2, pass the (6) U-shaped wire through the two round holes above the (2) left front bracket, and fix it with the (8) flange nut.

Put it on first, do not tighten it.

Running Boards Side Steps suitable for Toyota RAV4 XA40 (2013-2018) Dusted White

Code **RBTORAV4F1**


Use the (7) round head square neck bolt to fix the (9) clamping plate with the two holes below the (2) left front bracket to lock the side beam.

At this time, use the (8) flange nut to fix it, do not tighten it first. Install the right front bracket in the same way.

Figure 1



Figure 2

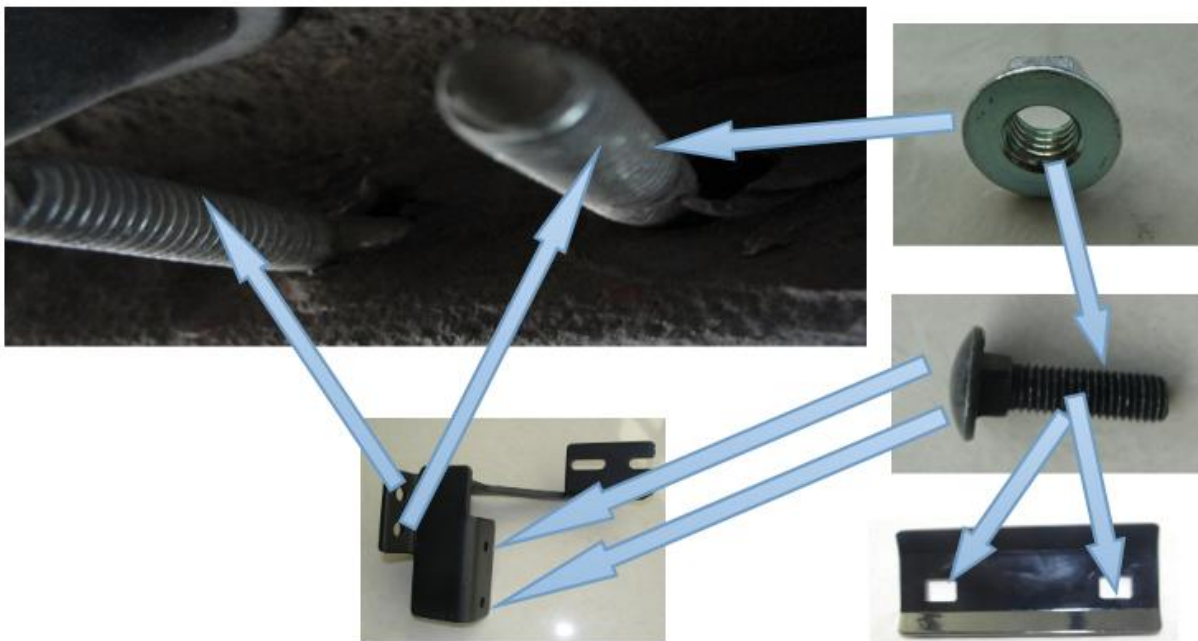

Running Boards Side Steps suitable for Toyota RAV4 XA40 (2013-2018) Dusted White

Code **RBTORAV4F1**

Installation of the left rear bracket:

Remove the leather pad at the lower rear side of the left vehicle body as shown in Figure 3, place the (10) T-bolt in the waist hole, remove the original hexagonal bolt shown in Figure 3, and install and fix the (3) left rear bracket in the corresponding position as shown in Figure 3.

Figure 3



Installation of the right rear bracket:


Remove the leather pad at the lower rear side of the right side of the vehicle body as shown in Figure 4, place the (10) T-bolt in the waist hole, and install and fix the (5) right rear bracket at the corresponding position as shown in Figure 4.

Do not tighten the nut yet.

Running Boards Side Steps suitable for Toyota RAV4 XA40 (2013-2018) Dusted White

Code **RBTORAV4F1**

Figure 4

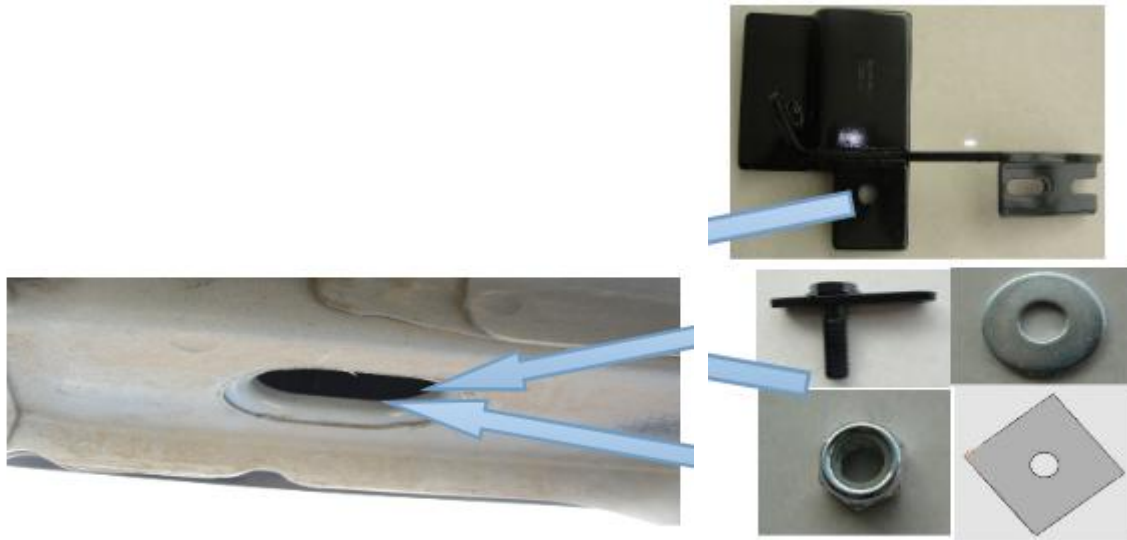

Installation and fixation of pedals:

Move the slide bolts under the pedals to the corresponding positions of the bracket holes, adjust the pedals to the appropriate positions, connect and fix the brackets and pedals with the slide bolts and nuts, and finally tighten the bolts and nuts under the vehicle body.

The pedals are installed.

Running Boards Side Steps suitable for Toyota RAV4 XA40 (2013-2018) Dusted White

Code **RBTORAV4F1**

This is the result:



Disclaimer: Our company is not responsible for any related problems and losses caused by improper installation and use.