
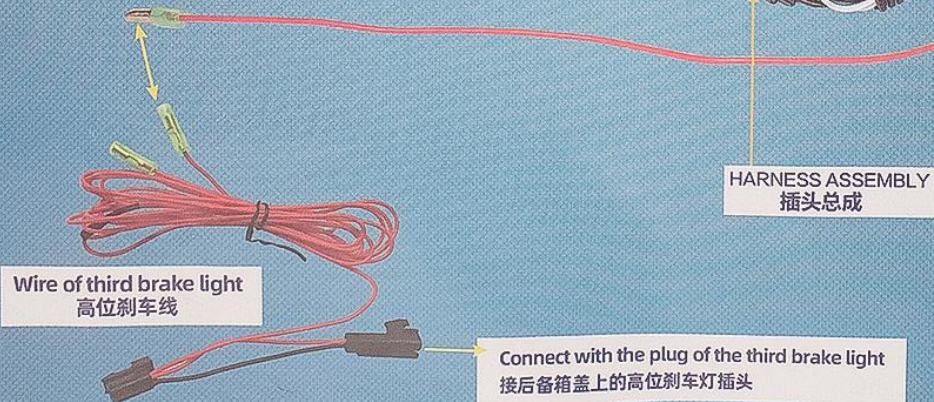
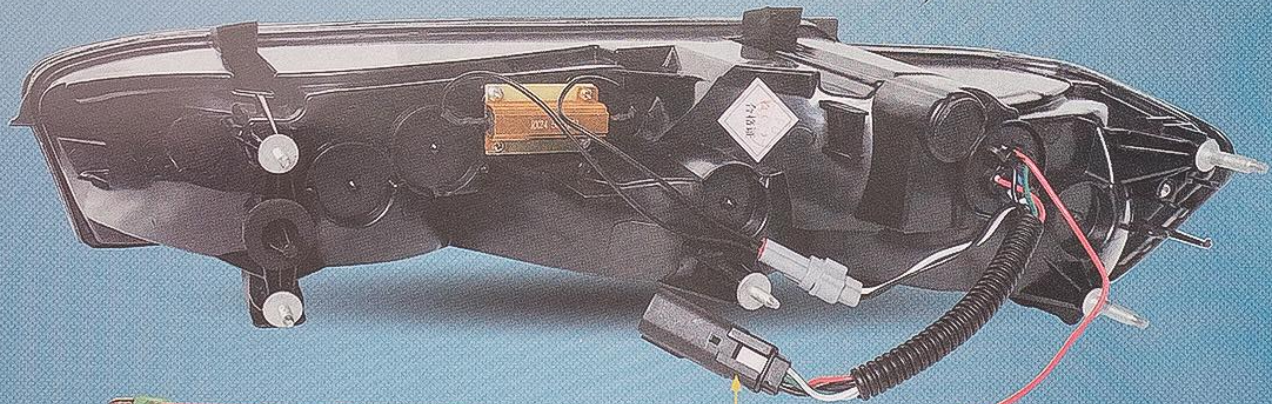


[YAB-CMR-0278 FUNCTION DESCRIPTION]

YAB-CMR-0278功能示意图

ADD: NO185, FENGDU 2ND ROAD, NORTH LUOFENG INDUSTRIAL AREA, TANG XIA, RUIAN, ZHEJIANG, CHINA
地址: 浙江瑞安市塘下镇罗凤北工业区凤都二路185号

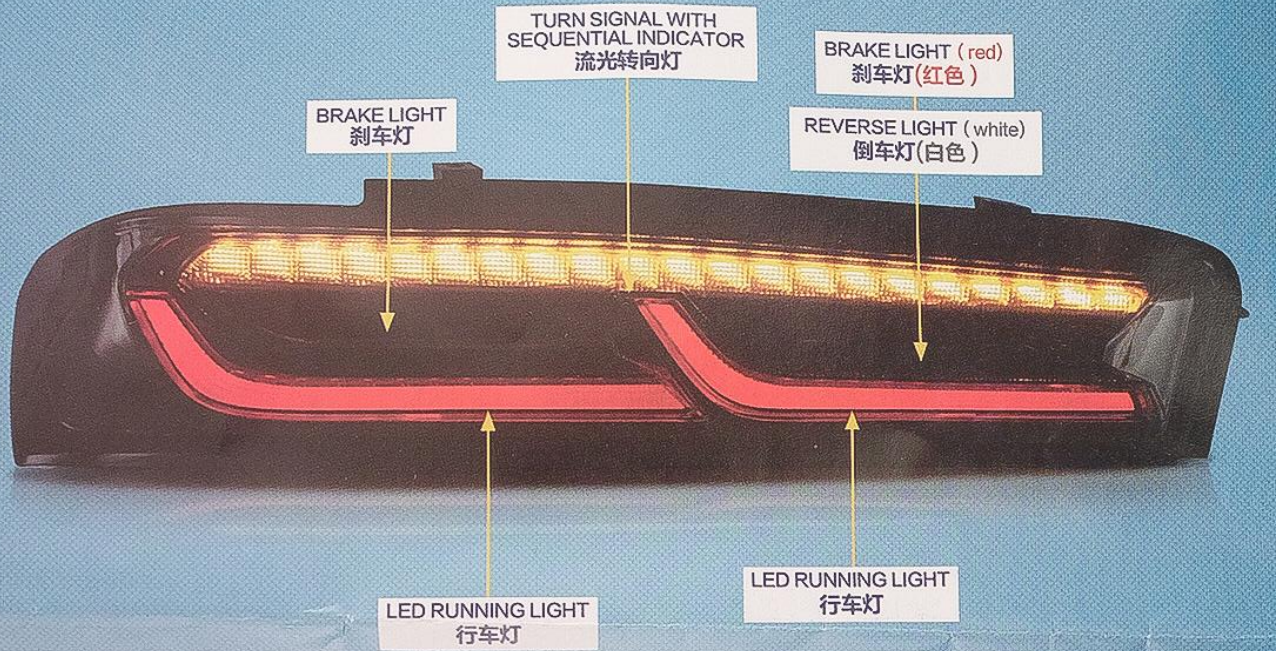

INSTALL INSTRUCTIONS



1) Remove Deck-lid Cover by removing 8 pushpins



2) Remove Tail Light Covers by removing 6 pushpins



3) Unplug Tail Light harness on each side



4) Remove 2 Push Pins from the inside trunk, on each side



5) Remove 3 - 8mm Tail Light bolts on each side (6 Total).
2 on the side, 1 in the back behind the tail light.



6) Remove Tail Lights by gently and slowly pulling back until you feel the clips break loose.




7) Install New Tail Lights by reversing steps 6-5, and by plugging in the new Tail Lights
8) Remove Trunk Latch Cover




9) Unplug Third Brake Light Plug from under the Deck-Lid



10) Attach Included Harness to Third Brake Light Plug, and attach to the Third Brake Light

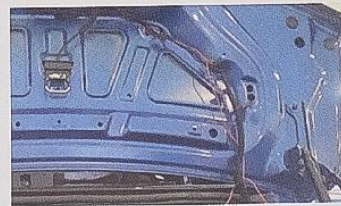

11) Feed wires down through original harness location, down to the tail lights

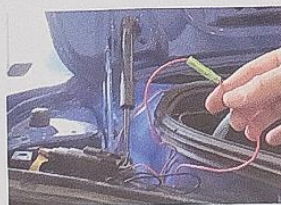

12) Connect new harness to the new Tail Lights Red Wire located on the inner side of the Lights