


Item : 40-441-1153N2

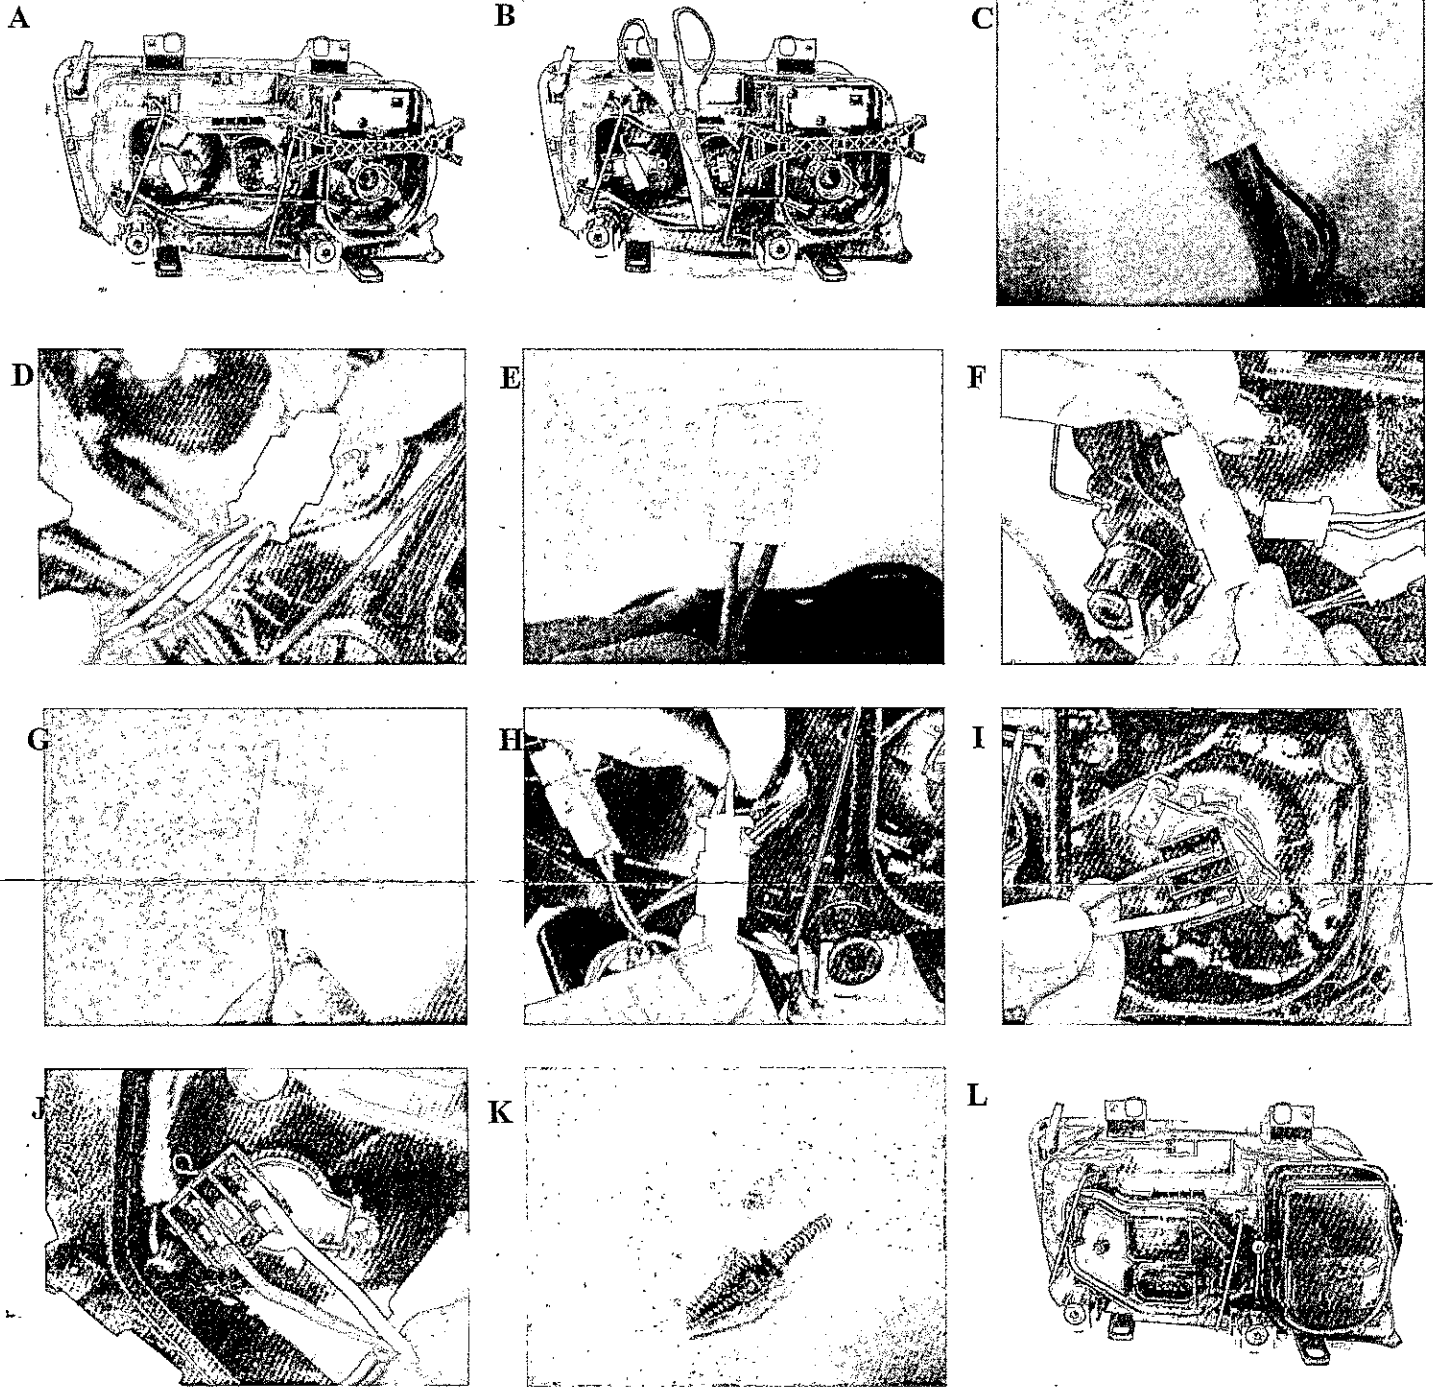

1. 圖 A 為客戶收到產品時的組裝狀態(Picture A the final status clients received.)
2. 圖 B 使用工具將束帶及固定座去除(Picture B remove the wire tie and mounting bracket with the tool.)
3. 將圖 C 所示插頭插至整燈上，如圖 D 所示(Insert the plug as shown on Picture C on the lamp. As shown on Picture D.)
4. 將圖 E 所示插頭插至整燈上，如圖 F 所示(Insert the plug as shown on Picture E on the lamp. As shown on Picture F.)
5. 將圖 G 所示插頭插至整燈上，如圖 H 所示(Insert the plug as shown on Picture G on the lamp. As shown on Picture H.)
6. 如圖 I 所示黃色、咖啡色線插頭插至 H7 近燈上(As shown on Picture G, insert the yellow line and brown line plug on H7 low beam.)
7. 如圖 J 所示白色、咖啡色線插頭插至 H7 遠燈上(As shown on Picture H, insert the white line and brown line plug on H7 high beam.)
8. 將圖 K 所示零件包內螺絲取出，使用工具將護蓋裝上即如圖 L 所示(Take out the screw in the component pack as shown on Picture K. Install the cover with the tool as shown on Picture I.)